


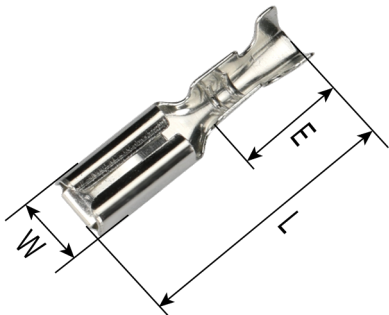
2.8 连接器系列

2.8 Series

A



B



技术参数 Specifications

使用线数(Hole count): 2 3 4 6 9 12

温度范围 (Temperature range): -25℃ ~ 85℃

额定电压 (Rated voltage):300V. AC/DC

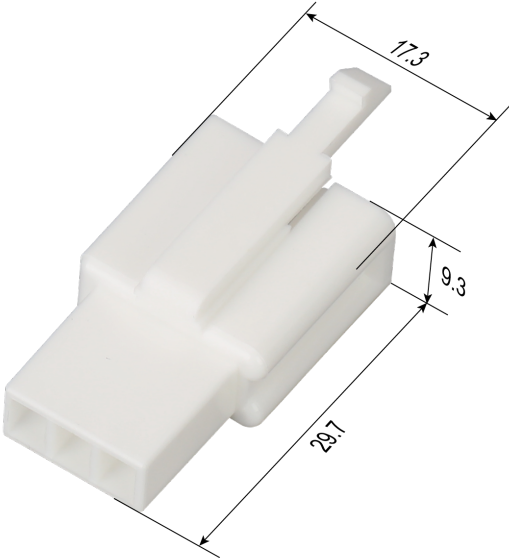
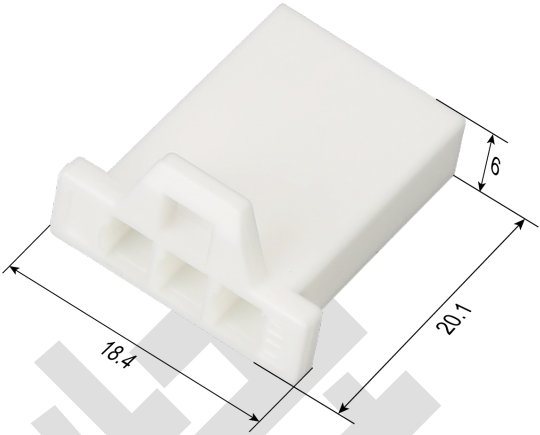
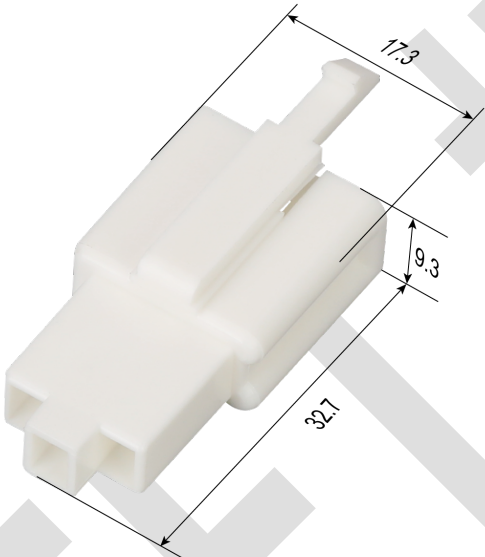
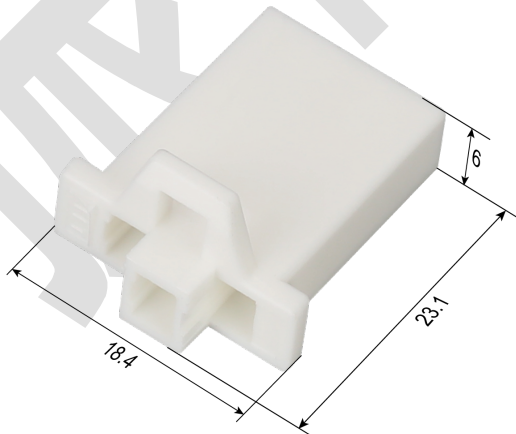
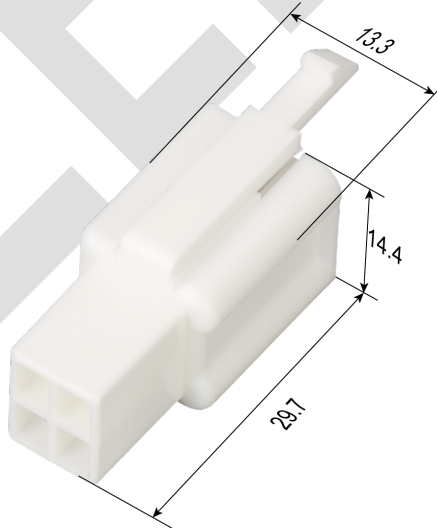
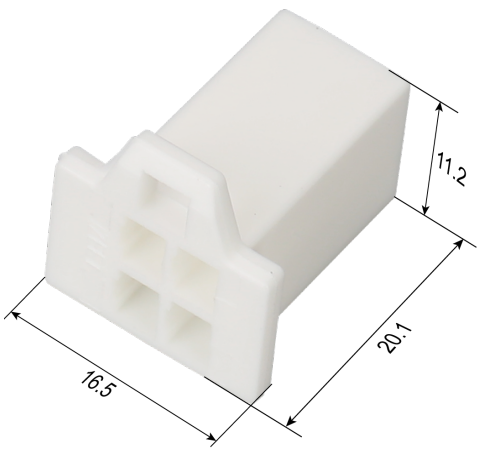
额定电流 (Rated current): 5A

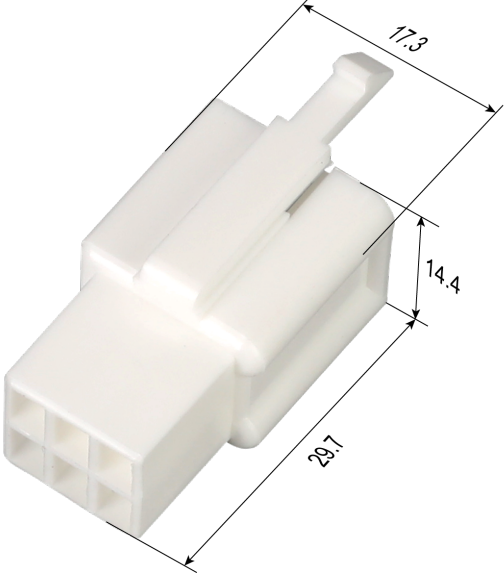
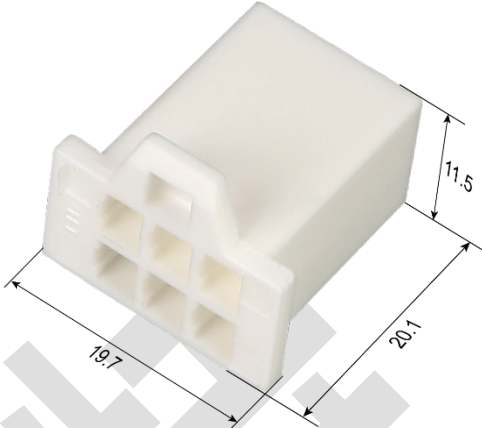
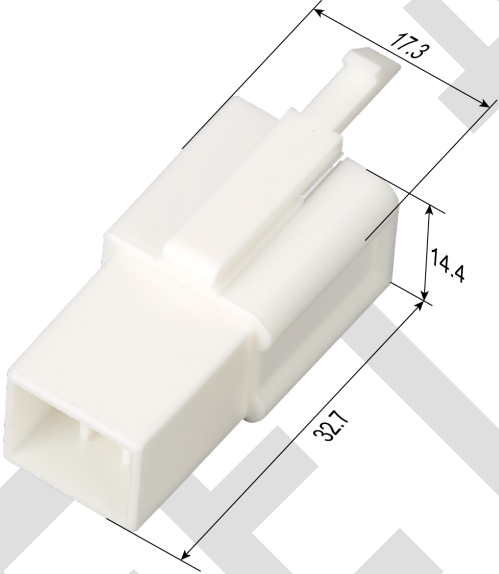
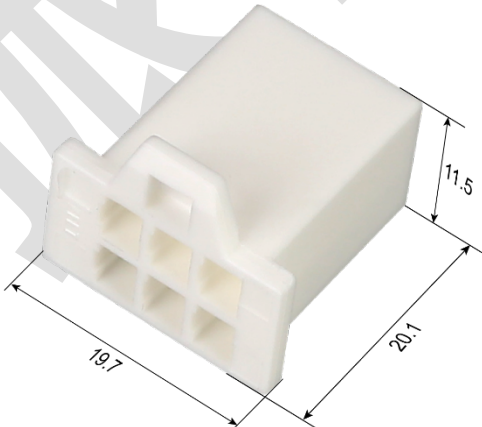
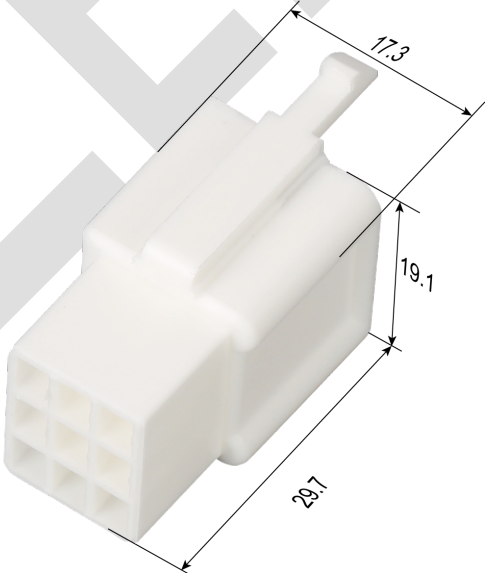
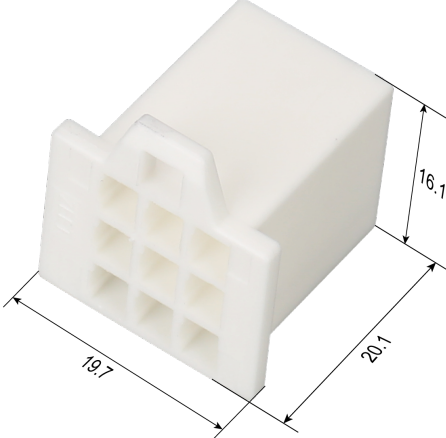
端子 Terminal

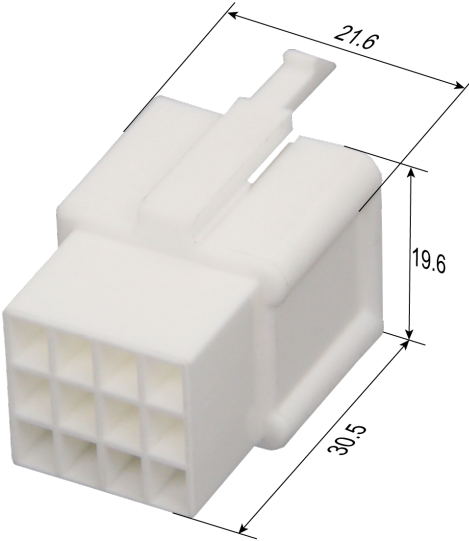
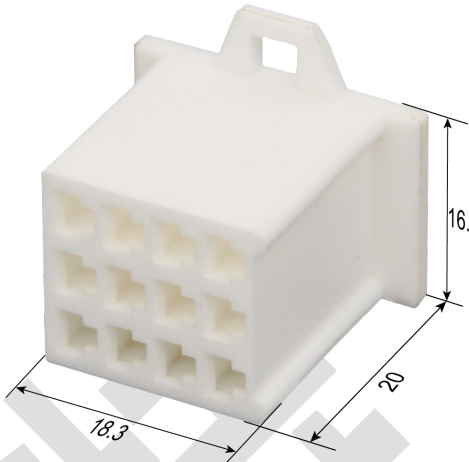
型号 Type	图号 Pic	压线范围 Wire Range		厚度 Thickness	材质 Material	尺寸 Dimension (mm)			对照表 Comparison No.	备注 Remark
		AWG#	mm ²			L	W	E		
DJ611-2.8AS	A	22~17	0.3~1.0	0.5	黄铜	21	2.8	7	插头	
DJ611-2.8A		20~17	0.5~1.0	0.5	黄铜	21	2.8	7	插头	
DJ621-A2.8A	B	20~17	0.5~1.0	0.25	磷铜	16	3.95	6.8	插座	

塑料件 Plastic parts

线数 Hole count	插头 Plug for male terminal	插座 Receptacle for female terminal
2	DJ7021-2.8-11	DJ7021-2.8-21
	Technical drawing of the male plug component DJ7021-2.8-11. Dimensions are indicated: 13.3 is the height of the top part, 9.3 is the height of the base, and 28.7 is the overall length.	Technical drawing of the female receptacle component DJ7021-2.8-21. Dimensions are indicated: 14.9 is the width, 20.1 is the length, and 6 is the height.

3	DJ7031-2.8-11 	DJ7031-2.8-21 
3	DJ7031L-2.8-11 	DJ7031L-2.8-21 
4	DJ7041-2.8-11 	DJ7041-2.8-21 

6	DJ7061-2.8-11 	DJ7061-2.8-21 
6	DJ7061L-2.8-11 	DJ7061-2.8-21 
9	DJ7091-2.8-11 	DJ7091-2.8-21 

12	DJ7121-2.8-11  21.6 19.6 30.5	DJ7121-2.8-21  16.2 20 18.3
----	--	--